

POWER RAMP

Wallwasher | Floodlights


White | Colors | RGB | RGBW



Made of anodized or lacquered aluminum and anti UV polycarbonate to resist shocks and bad weather

APPLICATIONS:

- Facade lighting
- Projector
- Backlighting of cornice

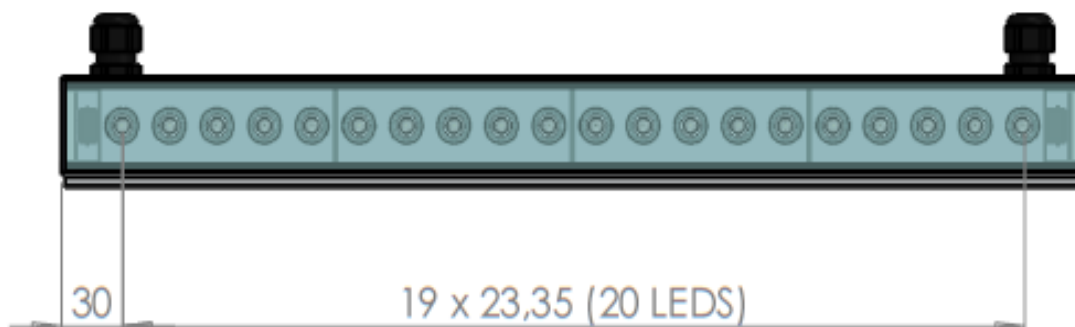

POWER RAMP

Wallwasher | Floodlights



Technical data	POWER RAMP EVO
Dimensions	Lg. 120mm to 1000mm section 45*55mm
Number of LEDs	4 to 40 LED
Power	10W to 72W
Body materials	Body made of anodized aluminium or lacquered with anti-corrosion paint
Glass materials	Anti-UV clear flush polycarbonate glass
Color	White Blue Green Red RGB RGBW selectable
color temperature	2700K to 6500K
Symmetrical beam	8° 2*5° 20° 35° 50°
Elliptical beam	15°*50°
Lifespan	50 000 hours L 70
operating temperature	Maximum 50°C
Voltage	24V 220Vca
Gradation/ Pilotage	Self-addressable DMX available
Electrical class	Class III and Class II depending on model
Connection	Integrated power supply with electronic overvoltage protection, double quick connectors for through-wiring. Cable 2*0.75mm ² 4*0.75mm ² 5*0.75mm ² and double PE polyamide Input/Output
IK	IK10
IP	IP65
Fixation	Mounted on a fixed or swivel stand with locking screws
Compliance	RoHS CE EN 60598-1
Glow wire test	850°C
Warranty	5 years
Place of manufacture	France