


# TUNELED

Tunnel LED Marker Aluminium

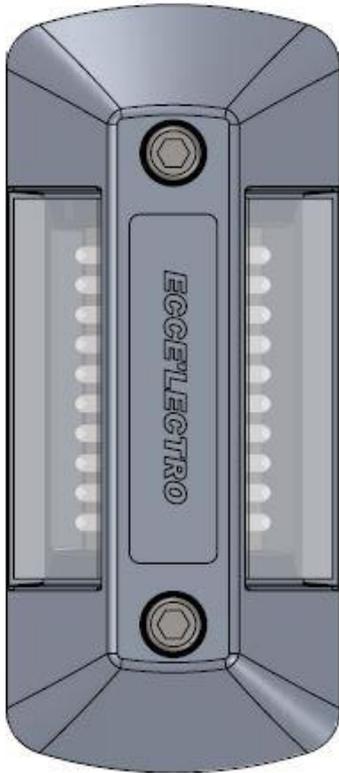

IP67 waterproof LED marker light with aluminium body designed to meet tunnel safety standards

## APPLICATIONS:

- Tunnel LED Marker



# TUNELED

## Tunnel LED Marker Aluminium



Technical data	TUNELED
Dimensions	220 x 95 x 24mm
Center distance	135mm
Number of LEDs	2*12 or 2*24
Power	2W
Body materials	Aluminium foundry
LED Color	Blue   Amber   Green   White   Red
Life span	150 000 hours
operating temperature	-20°C to +45°C
Voltage	24Vcc/ca   48Vcc/ca
Electrical class	Class III
Connection	CR1C1 cable 2x1.5mm <sup>2</sup>   2 CG on mounting base
IK	IK10
IP	IP67
Fixation	2 CHC M8 stainless steel screws with insulating barrel
Connector (optional)	M12 central polyamide
Support (optional)	Support with single or double CG for surface mounting
Compliance	NF-EN 60598-2-22
Glow wire test	850°C (PC glass)   960°C (heat-tempered glass)
Warranty	5 years
Place of manufacture	France

Photometric data +/- 10%, the manufacturer reserves the right to modify the characteristics without prior notice.

